

## 9 Series

Final level of protection in electrical distribution

# M9/Multi9

Multistandard protection for OEMs,  
residential and industry



# Content


Miniature circuit breakers .....	1
C60N .....	1
C60H .....	3
Residual current devices .....	6
RCCB-ID .....	6
Residual current device with over-current protection .....	9
N60N .....	9
Electrical control .....	12
TL & TLi impulse relays .....	12
Auxiliaries .....	15
Technical information .....	20
Circuit breakers tripping curves .....	20
Miniature circuit breakers for DC applications .....	22



# M9/Multi9

## Modular protection for OEMs, residential and industry

M9 (the same legendary Multi9™ by Schneider Electric) is a range of DIN rail modular devices, a solution offering great performance, M9 (Multi9) is a Spectre Electric offer dedicated to OEMs and all residential and industrial sectors, meeting the major standards for industry applications. Designed to meet your needs for most types of panels and machines, offering a wide range of modular devices, it provides protection, signaling functions and accessories.

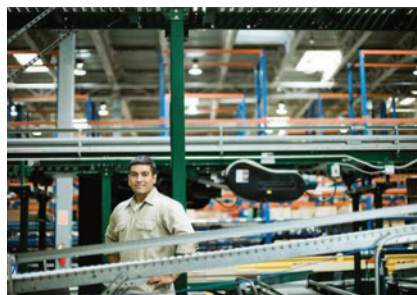



## Miniature circuit breakers

IEC/EN 60947-2: 10 kA, IEC 60898: **6000 A**  
C60N - B and C curves

IEC 

**Schneider** Electric | **spectre**



C60N 1P



C60N 2P



C60N 3P



C60N 4P

### Function

■ The circuit-breakers combine the following functions:

- protection of circuits against short-circuit currents
- protection of circuit against overload currents
- control
- isolation

C60N circuit breaker are used in the tertiary and industrial sectors.

### Tripping curves

#### B curve

When the short-circuit currents are weak (generators, long cables).

■ Power circuit:

- ratings: 2 to 63 A set at 30 °C
- tripping curve: the magnetic trip units operate between 3 and 5 I<sub>n</sub>.

#### C curve

Cables feeding conventional loads.

■ Power circuit:

- ratings: 2 to 63 A set at 30 °C
- tripping curve: the magnetic trip units operate between 5 and 10 I<sub>n</sub>.

### Technical data according to IEC 60898

■ Power circuit:

- voltage rating (U<sub>e</sub>): 230...400 V AC

□ breaking capacity:

- according to IEC 60898, I<sub>cn</sub> rated short-circuit capacity (O-CO cycle):

Rating (A)	Type	Voltage	Breaking capacity I <sub>cn</sub> (A)	Service breaking capacity (I <sub>cs</sub> )
2...63	1P	230/400	6000	100% of I <sub>cn</sub>
	2P, 3P, 4P	400	6000	100% of I <sub>cn</sub>

- limitation class: 3.

### Technical data according to IEC 60947-2

■ Power circuit:

- voltage rating (U<sub>e</sub>): 240...440 V AC / 12...240 V DC

□ impulse voltage (U<sub>imp</sub>): 6 kV

□ insulation voltage (U<sub>i</sub>): 500 V AC

□ breaking capacity:

- according to IEC 60947-2, I<sub>cu</sub> ultimate breaking capacity (O-CO cycle):

Alternating current (AC) 50/60 Hz					
Ultimate breaking capacity (Icu) according to IEC/EN 60947-2					Service breaking capacity (Ics)
	Voltage (Ue)				
Ph/Ph (2P, 3P, 4P)	240 V	415 V	-	440 V	
Ph/N (1P)	-	240 V	415 V	-	
Rating (In) 1 to 63 A	20 kA	10 kA	3 kA <sup>(*)</sup>	6 kA	75% of Icu
i <sub>IT</sub>	1.2 x 12 In				

(\*) Breaking capacity under 1 pole with IT isolated neutral system (case of double fault).

### Direct current (DC)

Ultimate breaking capacity (I<sub>cu</sub>) according to IEC/EN 60947-2

	Voltage (U <sub>e</sub> )				Service breaking capacity (I <sub>cs</sub> )
Between +/-	≤60 V	≤125 V	≤125 V	≤250 V	
Number of poles	1P	2P	3P	4P	
Rating (I <sub>n</sub> ) 1 to 63 A	15 kA	20 kA	30 kA	40 kA	100% of I <sub>cu</sub>

### General technical data

■ Fast closing: allows the high inrush currents of some loads to be better held.





■ Isolation with positive break indication: opening is indicated by a green strip on the device operating handle. This indicator shows opening contacts of all the poles.

## Miniature circuit breakers

IEC/EN 60947-2: 10 kA, IEC 60898: **6000 A**  
C60N - B and C curves (cont.)

### Catalogue numbers

spectre

C60N circuit breaker								Spectre Electric
Type	1P		2P		3P		4P	
								
Rating (In)	Curve B	C	Curve B	C	Curve B	C	Curve B	C
2 A	24046-SE M9F10102	24396-SE M9F11102	24072-SE M9F10202	24332-SE M9F11202	24085-SE M9F10302	24345-SE M9F11302	24098-SE M9F10402	24358-SE M9F11402
4 A	24048-SE M9F10104	24398-SE M9F11104	24074-SE M9F10204	24334-SE M9F11204	24087-SE M9F10304	24347-SE M9F11304	24100-SE M9F10404	24360-SE M9F11404
6 A	24049-SE M9F10106	24399-SE M9F11106	24075-SE M9F10206	24335-SE M9F11206	24088-SE M9F10306	24348-SE M9F11306	24101-SE M9F10406	24361-SE M9F11406
10 A	24050-SE M9F10110	24401-SE M9F11110	24076-SE M9F10210	24336-SE M9F11210	24089-SE M9F10310	24349-SE M9F11310	24102-SE M9F10410	24362-SE M9F11410
16 A	24051-SE M9F10116	24403-SE M9F11116	24077-SE M9F10216	24337-SE M9F11216	24090-SE M9F10316	24350-SE M9F11316	24103-SE M9F10416	24363-SE M9F11416
20 A	24052-SE M9F10120	24404-SE M9F11120	24078-SE M9F10220	24338-SE M9F11220	24091-SE M9F10320	24351-SE M9F11320	24104-SE M9F10420	24364-SE M9F11420
25 A	24053-SE M9F10125	24405-SE M9F11125	24079-SE M9F10225	24339-SE M9F11225	24092-SE M9F10325	24352-SE M9F11325	24105-SE M9F10425	24365-SE M9F11425
32 A	24054-SE M9F10132	24406-SE M9F11132	24080-SE M9F10232	24340-SE M9F11232	24093-SE M9F10332	24353-SE M9F11332	24106-SE M9F10432	24366-SE M9F11432
40 A	24055-SE M9F10140	24407-SE M9F11140	24081-SE M9F10240	24341-SE M9F11240	24094-SE M9F10340	24354-SE M9F11340	24107-SE M9F10440	24367-SE M9F11440
50 A	24056-SE M9F10150	24408-SE M9F11150	24082-SE M9F10250	24342-SE M9F11150	24095-SE M9F10350	24355-SE M9F11350	24108-SE M9F10450	24368-SE M9F11450
63 A	24057-SE M9F10163	24409-SE M9F11163	24083-SE M9F10263	24343-SE M9F11163	24096-SE M9F10363	24356-SE M9F11363	24109-SE M9F10463	24369-SE M9F11463
								Schneider Electric
Rating (In)	Curve B	C	Curve B	C	Curve B	C	Curve B	C
2 A	24046	24396	24072	24332	24085	24345	24098	24358
4 A	24048	24398	24074	24334	24087	24347	24100	24360
6 A	24049	24399	24075	24335	24088	24348	24101	24361
10 A	24050	24401	24076	24336	24089	24349	24102	24362
16 A	24051	24403	24077	24337	24090	24350	24103	24363
20 A	24052	24404	24078	24338	24091	24351	24104	24364
25 A	24053	24405	24079	24339	24092	24352	24105	24365
32 A	24054	24406	24080	24340	24093	24353	24106	24366
40 A	24055	24407	24081	24341	24094	24354	24107	24367
50 A	24056	24408	24082	24342	24095	24355	24108	24368
63 A	24057	24409	24083	24343	24096	24356	24109	24369
width in 9-mm modules	2		4		6		8	

## Miniature circuit breakers

IEC/EN 60947-2: 15 kA, IEC 60898: 10000 A  
C60H - B and C curves

IEC 

**Schneider** Electric | **spectre**



C60H 1P



C60H 2P



C60H 3P



C60H 4P

### Function

■ The circuit-breakers combine the following functions:

- ☐ protection of circuits against short-circuit currents
- ☐ protection of circuit against overload currents
- ☐ control
- ☐ isolation

C60H circuit breaker are used in the tertiary and industrial sectors.

### Tripping curves

#### B curve

When the short-circuit currents are weak (generators, long cables).

■ Power circuit:

- ☐ ratings: 2 to 63 A set at 30 °C
- ☐ tripping curve: the magnetic trip units operate between 3 and 5  $I_n$ .

#### C curve

Cables feeding conventional loads.

■ Power circuit:

- ☐ ratings: 2 to 63 A set at 30 °C
- ☐ tripping curve: the magnetic trip units operate between 5 and 10  $I_n$ .

### Technical data according to IEC 60898

■ Power circuit:

- ☐ voltage rating ( $U_e$ ): 230...400 V AC

☐ breaking capacity:

- according to IEC 60898,  $I_{cn}$  rated short-circuit capacity (O-CO cycle):

Rating (A)	Type	Voltage	Breaking capacity $I_{cn}$ (A)	Service breaking capacity (Ics)
2...63	1P	230/400	10000	75% of $I_{cn}$
	2P, 3P, 4P	400	10000	75% of $I_{cn}$

- ☐ limitation class: 3.

### Technical data according to IEC 60947-2

■ Power circuit:

- ☐ voltage rating ( $U_e$ ): 240...440 V AC / 12...240 V DC

☐ impulse voltage ( $U_{imp}$ ): 6 kV

☐ insulation voltage ( $U_i$ ): 500 V AC

☐ breaking capacity:

- according to IEC 60947-2,  $I_{cu}$  ultimate breaking capacity (O-CO cycle):

Alternating current (AC) 50/60 Hz					
Ultimate breaking capacity (Icu) according to IEC/EN 60947-2					Service breaking capacity (Ics)
	Voltage (Ue)				
Ph/Ph (2P, 3P, 4P)	240 V	415 V	-	440 V	
Ph/N (1P)	-	240 V	415 V	-	
Rating (In) 1 to 63 A	30 kA	15 kA	3 kA <sup>(*)</sup>	10 kA	50% of Icu
i <sub>ΔT</sub>	1.2 x 12 In				

(\*) Breaking capacity under 1 pole with IT isolated neutral system (case of double fault).

### Direct current (DC)

Ultimate breaking capacity ( $I_{cu}$ ) according to IEC/EN 60947-2

	Voltage ( $U_e$ )				Service breaking capacity (Ics)
	Between +/- $\leq 60$ V	$\leq 125$ V	$\leq 125$ V	$\leq 250$ V	
Number of poles	1P	2P	3P	4P	
Rating ( $I_n$ ) 1 to 63 A	20 kA	25 kA	40 kA	50 kA	100% of $I_{cu}$

### General technical data

■ Fast closing: allows the high inrush currents of some loads to be better held.





■ Isolation with positive break indication: opening is indicated by a green strip on the device operating handle. This indicator shows opening contacts of all the poles.

## Miniature circuit breakers

IEC/EN 60947-2: 10 kA, IEC 60898: 10000 A  
C60H - B and C curves (cont.)

### Catalogue numbers

spectre

C60H circuit breaker								Spectre Electric	
Type	1P		2P		3P		4P		
									
Rating (In)	Curve		Curve		Curve		Curve		
	B	C	B	C	B	C	B	C	
2 A	24640-SE M9F13102	24969-SE M9F14102	24722-SE M9F13202	24982-SE M9F14202	24735-SE M9F13302	24995-SE M9F14302	24748-SE M9F13402	25008-SE M9F14402	
4 A	24642-SE M9F13104	24971-SE M9F14104	24724-SE M9F13204	24984-SE M9F14204	24737-SE M9F13304	24997-SE M9F14304	24750-SE M9F13404	25010-SE M9F14404	
6 A	24643-SE M9F13106	24972-SE M9F14106	24725-SE M9F13206	24985-SE M9F14206	24738-SE M9F13306	24998-SE M9F14306	24751-SE M9F13406	25011-SE M9F14406	
10 A	24644-SE M9F13110	24973-SE M9F14110	24726-SE M9F13210	24986-SE M9F14210	24739-SE M9F13310	24999-SE M9F14310	24752-SE M9F13410	25012-SE M9F14410	
16 A	24646-SE M9F13116	24974-SE M9F14116	24727-SE M9F13216	24987-SE M9F14216	24740-SE M9F13316	25000-SE M9F14316	24753-SE M9F13416	25013-SE M9F14416	
20 A	24647-SE M9F13120	24975-SE M9F14120	24728-SE M9F13220	24988-SE M9F14220	24741-SE M9F13320	25001-SE M9F14320	24754-SE M9F13420	25014-SE M9F14420	
25 A	24648-SE M9F13125	24976-SE M9F14125	24729-SE M9F13225	24989-SE M9F14225	24742-SE M9F13325	25002-SE M9F14325	24755-SE M9F13425	25015-SE M9F14425	
32 A	24649-SE M9F13132	24977-SE M9F14132	24730-SE M9F13232	24990-SE M9F14232	24743-SE M9F13332	25003-SE M9F14332	24756-SE M9F13432	25016-SE M9F14432	
40 A	24650-SE M9F13140	24978-SE M9F14140	24731-SE M9F13240	24991-SE M9F14240	24744-SE M9F13340	25004-SE M9F14340	24757-SE M9F13440	25017-SE M9F14440	
50 A	24651-SE M9F13150	24979-SE M9F14150	24732-SE M9F13250	24992-SE M9F14250	24745-SE M9F13350	25005-SE M9F14350	24758-SE M9F13450	25018-SE M9F14450	
63 A	24652-SE M9F13163	24980-SE M9F14163	24733-SE M9F13263	24993-SE M9F14263	24746-SE M9F13363	25006-SE M9F14363	24759-SE M9F13463	25019-SE M9F14463	
width in 9-mm modules	2		4		6		8		




## Miniature circuit breakers


IEC/EN 60947-2: 10 kA, IEC 60898: **6000 A**  
C60N - B and C curves

IEC/EN 60947-2: 15 kA, IEC 60898: **10000 A**  
C60H - B and C curves


### Connection




Rating	Tightening torque	Without accessory	
		Copper cables	Rigid, flexible or with ferrule
2 to 25 A	2.5 N.m (22 lb.in)	1 to 10 mm <sup>2</sup>	AWG #18 to #8
32 to 63 A	3.5 N.m (31 lb.in)	1.5 to 16 mm <sup>2</sup>	AWG #16 to #6



Clip on DIN rail 35 mm



Indifferent position of installation

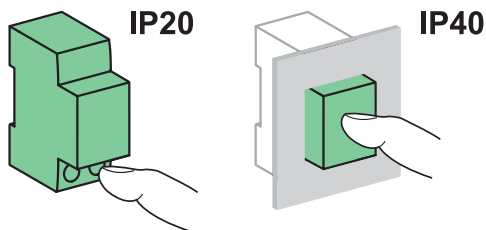


### Technical data

#### According to IEC/EN 60947-2

Insulation voltage (Ui)			500 V AC
Pollution degree			3
Rated impulse withstand voltage (Uimp)			6 kV
Thermal tripping	Reference temperature		50°C / 122°F
Magnetic tripping (Ii)	B curve	in alternative current	4 In ± 20%
		in direct current	5.7 In (± 20%)
	C curve	in alternative current	8.5 In ± 20%
		in direct current	12 In (± 20%)
	According to current frequency		50/60 Hz
Utilization category			A
Additional characteristics			
Degree of protection (IEC 60529)	Device only		IP20
	Device in modular enclosure		IP40 Insulation class II
Endurance (O-C)	Electrical		10,000 cycles
	Mechanical		20,000 cycles
Serving temperature			-30°C to +70°C / -22°F to 158°F
Storage temperature			-40°C to +80°C / -40°F to 176°F
Tropicalization (IEC 60068-1)			Treatment 2 (relative humidity 95% at 55°C / 131°F)

### Dimensions (mm)

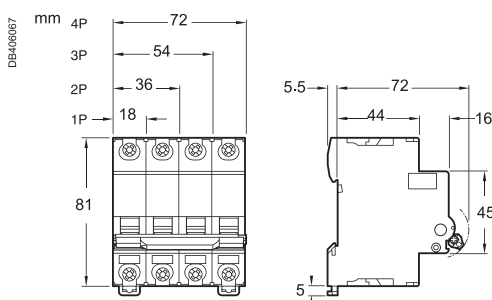

### Weight (g)

Circuit-breaker	
Type	C60N , C60H
1P	120 g
2P	240 g
3P	360 g
4P	480 g

## Residual current devices

### IEC/EN

## RCCB ID - IEC/EN 61008-1 – Residual Current Circuit Breakers – AC, A & A-SI types

### IEC 61008-1







### IEC/EN 61008-1

According to the above standard:


- RCCB-ID residual current circuit breakers offer the following functions:
  - protection of persons against electric shock by direct contact (30 mA),
  - protection of persons against electric shock by indirect contact (100, 300 mA),
  - protection of installations against fire risks (300 mA).



### Catalogue numbers

#### RCCB-ID residual current circuit breakers

Spectre Electric								
Type		AC 			A 			
2P	Sensitivity	30 mA	100 mA	300 mA	30 mA	100 mA	300 mA	
	Rating	25 A	M9R12225-S	M9R12225-S	M9R14225-S	M9R21225-S	M9R22225-S	M9R24225-S
		32 A	M9R11232-S	M9R12232-S	M9R14232-S	M9R21232-S	M9R22232-S	M9R24232-S
		40 A	M9R11240-S	M9R12240-S	M9R14240-S	M9R21240-S	M9R22240-S	M9R24240-S
		63 A	M9R11263-S	M9R12263-S	M9R14263-S	M9R21263-S	M9R22263-S	M9R24263-S
4P	Sensitivity	30 mA	100 mA	300 mA	30 mA	100 mA	300 mA	
	Rating	25 A	M9R11425-S	M9R12425-S	M9R14425-S	M9R21425-S	M9R22425-S	M9R24425-S
		32 A	M9R11432-S	M9R12432-S	M9R14432-S	M9R21432-S	M9R22432-S	M9R24432-S
		40 A	M9R11440-S	M9R12440-S	M9R14440-S	M9R21440-S	M9R22440-S	M9R24440-S
		63 A	M9R11463-S	M9R12463-S	M9R14463-S	M9R21463-S	M9R22463-S	M9R24463-S
Voltage rating (Ue)		2P	230 - 240 V					
		4P	400 - 415 V					
Operating frequency		50 Hz						

### Connection







Rating	Tightening torque	Copper cables			
		Rigid		Flexible or with ferrule	
25 to 63 A	3.5 N.m / 31 lb.in			1 to 10 mm <sup>2</sup>	AWG #18 to #8

## Residual current devices

### IEC/EN
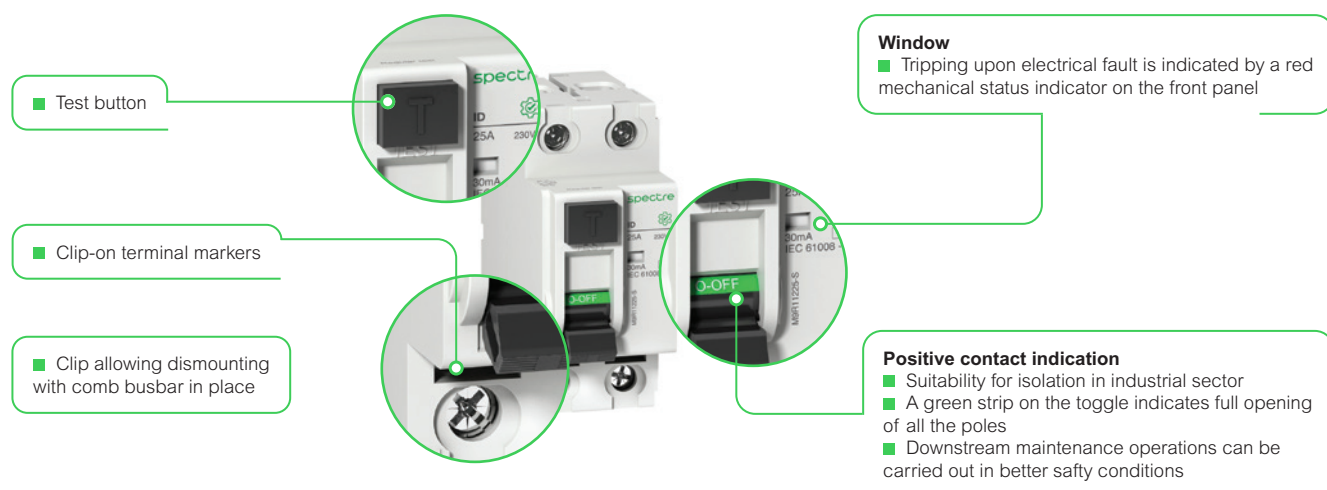
## RCCB ID - IEC/EN 61008-1 – Residual Current Circuit Breakers – AC, A & A-SI types (cont.)




Schneider Electric							
A-SI 			AC 		A-SI 		Width in 9-mm modules
30 mA	100 mA	300 mA	30 mA	300 mA	30 mA	300 mA	
M9R31225-S	M9R32225-S	M9R34225-S	M9R11225	-	-	-	4
M9R31232-S	M9R32232-S	M9R34232-S	-	-	-	-	
M9R31240-S	M9R32240-S	M9R34240-S	M9R11240	M9R14240	M9R31240	M9R35240	
M9R31263-S	M9R32263-S	M9R34263-S	M9R11263	-	-	-	
30 mA	100 mA	300 mA	30 mA	300 mA	30 mA	300 mA	
M9R31425-S	M9R32425-S	M9R34425-S	-	-	-	-	8
M9R31432-S	M9R32432-S	M9R34432-S	-	-	-	-	
M9R31440-S	M9R32440-S	M9R34440-S	M9R11440	M9R14440	M9R31440	M9R35440	
M9R31463-S	M9R32463-S	M9R34463-S	-	M9R14463	-	M9R35463	


# Residual current devices

## IEC/EN



### RCCB ID - IEC/EN 61008-1 – Residual Current Circuit Breakers – AC, A & A-SI types (cont.)




Clip on to 35 mm (1.38 in) DIN rail






Any installation position

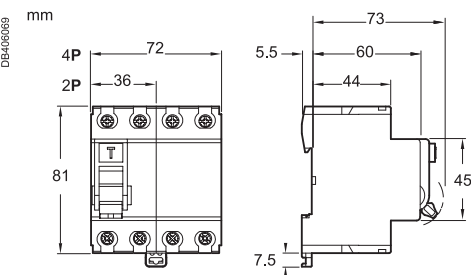

#### Dimensions (mm)



#### Technical data

According to IEC/EN 60947-2		
Insulation voltage (Ui)		440 V
Pollution degree		3
Rated impulse withstand voltage (Uimp)		6 kV
According to IEC/EN 61008-1		
Making and breaking capacity (Im/IΔm)		10 In
Impulse current withstand (8/20 μs) without tripping	A & AC types	250 Å
	A-SI type	3 kÅ
Rated conditional short-circuit current (Inc/IΔc)	with fuse	6,000 A
		
Behaviour in case of voltage drop		Residual current protection down to 0 V according to IEC/EN 61008-1 § 3.3.4
Additional characteristics		
Degree of protection (IEC 60529)	Device only	IP20
	Device in modular enclosure	IP40 Insulation class II
Endurance (O-C)	Electrical	2,000 cycles
	Mechanical	20,000 cycles
Operating temperature	AC type	-5°C to +40°C
	A & A-SI types	-25°C to +40°C
		
Storage temperature		-40°C to +60°C
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity 95% at 55°C)

#### Weight (g)

Residual current circuit breaker (RCCB)	
Type	ID
2P	192 g
4P	324 g

## Residual current device with over-current protection

### RCBO - IEC/EN 61009-1 - Residual Current Circuit Breakers with Over-current Protection– AC & A types







Country approval pictograms

IEC/EN 61009-1



- The N60N residual current device provides complete protection for final circuits (against overcurrents and insulation faults):
  - protection for people against electric shocks by direct contacts (30 mA),
  - protection for people against electric shocks by indirect contacts (100, 300 mA),
  - protection of installations against risk of fire (300 mA).
- The N60N RCBOs are circuit breakers which combine the following functions:
  - circuit protection against short-circuit currents,
  - circuit protection against over-load currents,
  - breaking and industrial disconnections according to IEC/EN 60947-2.


#### Catalogue numbers

N60N 6000										
Type		AC 			A 			Width in 9-mm modules		
1P+N	Sensitivity	30 mA	100 mA	300 mA	30 mA	100 mA	300 mA			
	B curve	Rating (In)	6 A	M9D116B06	M9D126B06	M9D146B06	M9D216B06	M9D226B06	M9D246B06	4
		10 A	M9D116B10	M9D126B10	M9D146B10	M9D216B10	M9D226B10	M9D246B10		
		16 A	M9D116B16	M9D126B16	M9D146B16	M9D216B16	M9D226B16	M9D246B16		
		20 A	M9D116B20	M9D126B20	M9D146B20	M9D216B20	M9D226B20	M9D246B20		
		25 A	M9D116B25	M9D126B25	M9D146B25	M9D216B25	M9D226B25	M9D246B25		
		32 A	M9D116B32	M9D126B32	M9D146B32	M9D216B32	M9D226B32	M9D246B32		
		40 A	M9D116B40	M9D126B40	M9D146B40	M9D216B40	M9D226B40	M9D246B40		
		50 A	M9D116B50	M9D126B50	M9D146B50	M9D216B50	M9D226B50	M9D246B50		
	C curve	Rating (In)	6 A	M9D116C06	M9D126C06	M9D146C06	M9D216C06	M9D226C06	M9D246C06	4
		10 A	M9D116C10	M9D126C10	M9D146C10	M9D216C10	M9D226C10	M9D246C10		
		16 A	M9D116C16	M9D126C16	M9D146C16	M9D216C16	M9D226C16	M9D246C16		
		20 A	M9D116C20	M9D126C20	M9D146C20	M9D216C20	M9D226C20	M9D246C20		
		25 A	M9D116C25	M9D126C25	M9D146C25	M9D216C25	M9D226C25	M9D246C25		
		32 A	M9D116C32	M9D126C32	M9D146C32	M9D216C32	M9D226C32	M9D246C32		
	B curve	Rating (In)	6 A	M9D118B06	M9D128B06	M9D148B06	M9D218B06	M9D228B06	M9D248B06	8
		10 A	M9D118B10	M9D128B10	M9D148B10	M9D218B10	M9D228B10	M9D248B10		
		16 A	M9D118B16	M9D128B16	M9D148B16	M9D218B16	M9D228B16	M9D248B16		
		20 A	M9D118B20	M9D128B20	M9D148B20	M9D218B20	M9D228B20	M9D248B20		
		25 A	M9D118B25	M9D128B25	M9D148B25	M9D218B25	M9D228B25	M9D248B25		
		32 A	M9D118B32	M9D128B32	M9D148B32	M9D218B32	M9D228B32	M9D248B32		
		40 A	M9D118B40	M9D128B40	M9D148B40	M9D218B40	M9D228B40	M9D248B40		
	C curve	Rating (In)	6 A	M9D118C06	M9D128C06	M9D148C06	M9D218C06	M9D228C06	M9D248C06	8
		10 A	M9D118C10	M9D128C10	M9D148C10	M9D218C10	M9D228C10	M9D248C10		
		16 A	M9D118C16	M9D128C16	M9D148C16	M9D218C16	M9D228C16	M9D248C16		
		20 A	M9D118C20	M9D128C20	M9D148C20	M9D218C20	M9D228C20	M9D248C20		
		25 A	M9D118C25	M9D128C25	M9D148C25	M9D218C25	M9D228C25	M9D248C25		
		32 A	M9D118C32	M9D128C32	M9D148C32	M9D218C32	M9D228C32	M9D248C32		
Voltage rating (Ue)		1P+N	230 - 240 V							
		3P+N	400 - 415 V							
Operating frequency		50/60 Hz								




## Residual current device with over-current protection

### RCBO - IEC/EN 61009-1 - Residual Current Circuit Breakers with Over-current Protection– AC & A types (cont.)

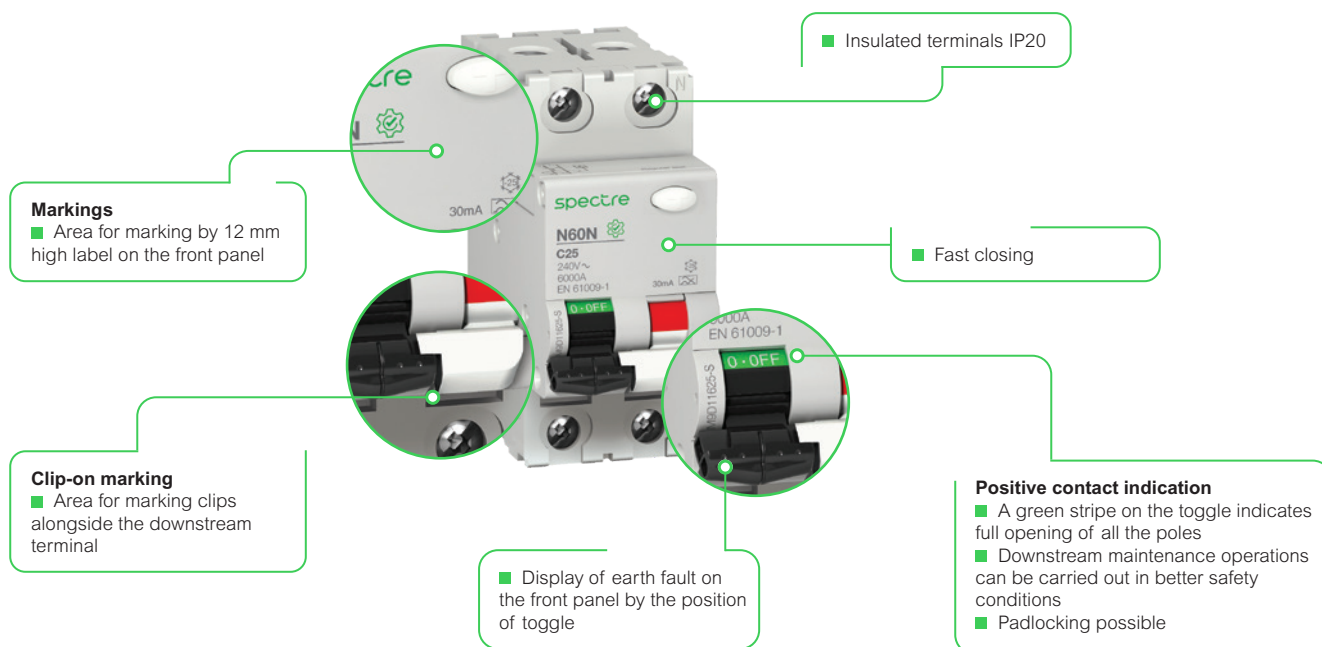


#### Connection



Type	Connection	Tightening torque	Comb busbar	Copper cables	
				Rigid	Flexible or with ferrule
				DB122345.eps	DB122346.eps
M9 N60N	Top	2N.m	■	1 to 16 mm <sup>2</sup> AWG #18 to #6	1 to 10 mm <sup>2</sup> AWG #18 to #8
	Bottom		■		

#### Dimensions (mm)

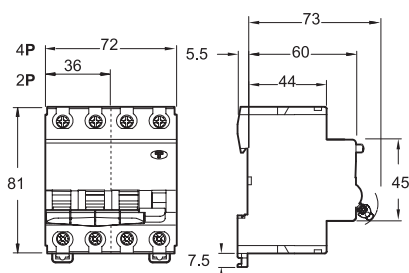


#### Weight (g)


Residual current device with over-current protection	
Type	N60N
1P+N	220 g
3P+N	460 g

## Residual current device with over-current protection


### RCBO - IEC/EN 61009-1 - Residual Current Circuit Breakers with Over-current Protection– AC & A types (cont.)




Clip on to 35 mm (1.38 in) DIN rail



Any installation position



IP20




IP40

#### Technical data

##### According to IEC/EN 60947-2

Type	N60N
Insulation voltage (Ui)	440 V
Pollution degree	3
Rated impulse withstand voltage (Uimp)	6 kV
Setting temperature for ratings	4 kV
Earth leakage protection with instantaneous tripping	30, 100, 300 mA
magnetic tripping	B curve C curve
	Between 3 and 5 In Between 5 and 10 In
Utilization category	A
Insulation class	2
8/20 µs impulse withstand current	AC type A type
	250 Å 250 Å

##### According to IEC/EN 61008-1

Limitation class	3
Rated breaking capacity (Icn)	6000 A
Rated residual breaking and making capacity (IΔm)	6000 A
Behaviour in case of voltage drop	 Residual current protection down to 0 V according to IEC/EN 61009-1 § 3.3.8

##### Additional characteristics

Degree of protection (IEC 60529)	Device only Device in modular enclosure	IP20 IP40 Insulation class II
Endurance (O-C)	Electrical Mechanical	≤20 A ≥25 A 20,000 cycles 10,000 cycles 20,000 cycles
Overvoltage category (IEC 60364)		IV
Operating temperature	AC type A type	-5°C to +60°C -25°C to +60°C
Storage temperature		-30°C to +70°C
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity of 95% at 55°C / 131°F)

# Electrical control

## TL & TLi impulse relays



### IEC/EN 60669-2-2

#### Impulse relays:

- Closing of the impulse relay pole(s) is triggered by an impulse on the coil.
- Having two stable mechanical positions, the pole(s) will be opened by the next impulse. Each impulse received by the coil reverses the position of the pole(s).
- Can be controlled by an unlimited number of pushbuttons.
- Zero energy consumption.

#### TL

- The impulse relays are used to control, by means of pushbuttons, lighting circuits consisting of:
  - incandescent lamps, low-voltage halogen lamps, etc. (resistive loads)
  - fluorescent lamps, discharge lamps, etc. (inductive loads)

#### Changeover contact TLi

- This impulse relay has a changeover contact

### Catalogue numbers

TL impulse relays						
Type	1P		2P		3P	
	1 NO		2 NO		3 NO	
Rating (In)	Control voltage (Uc)					
	(V AC)	(V DC)				
	(50/60 Hz)					
16 A	12	6	M9C30011	M9C30012	M9C30013	M9C30014
	24	12	M9C30111	M9C30112	M9C30113	M9C30114
	48	24	M9C30211	M9C30212	M9C30213	M9C30214
	130	48	M9C30311	M9C30312	M9C30313	M9C30314
	230...240	110	M9C30811	M9C30812	M9C30813	M9C30814
Width in 9 mm modules			2	2	4	4
			1 NO			
32 A	230...240	110	M9C30831-S			
Width in 9 mm modules			2			

TLi impulse relays						
Type	1P		2P		3P	
			1 NO + 1 NC		2 NO + 1 NC	
					1 NO + 1 NC + 1 NO + 1 NC	
Rating (In)	Control voltage (Uc)					
	(V AC)	(V DC)				
	(50/60 Hz)					
16 A	12	6	-	M9C30015	M9C30016	M9C30017
	24	12	-	M9C30115	M9C30116	M9C30117
	48	24	-	M9C30215	M9C30216	M9C30217
	130	48	-	M9C30315	M9C30316	M9C30317
	230...240	110	-	M9C30815	M9C30816	M9C30817
Width in 9 mm modules			-	2	4	4

# Electrical control

## TL & TLi impulse relays (cont.)

Consistent with the entire Multi9 offer and with all types of lighting

Manual controls on front face: direct and priority manual control by O-I toggle

Mechanical contact position indicator


Insulated terminals IP20

Disconnection of remote control by selector switch for maintenance operation

### Connection

Type	Rating	Circuit	Tightening torque	Copper cables	
				Rigid	Flexible or with ferrule
TL, TLi	16 A	Control	1 N.m		
		Power		0.5 to 4 mm <sup>2</sup>	1 to 4 mm <sup>2</sup>
TL	32 A	Control	1.2 N.m	0.5 to 4 mm <sup>2</sup>	1 to 4 mm <sup>2</sup>
		Power		2.5 to 6 mm <sup>2</sup>	2.5 to 6 mm <sup>2</sup>

### Dimensions (mm)

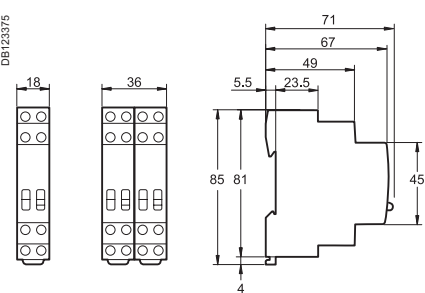


### Weight (g)


Impulse relay	
Type	TL, TLi
1P	94 g
2P	102 g
3P	210 g
4P	218 g

## Electrical control


### TL & TLi impulse relays (cont.)



Clip on DIN rail 35 mm (1.38 in)




Indifferent position of installation

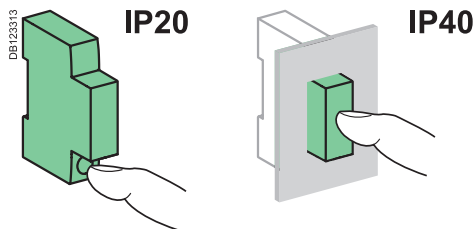

#### Technical data

Control circuit			
		TL and TLi 16 A	TL 32 A
Control voltage (Uc)	Tolerance at 50 Hz	+6 %, -15 %	
	Tolerance at 60 Hz	±6 %	
	Tolerance V DC	+6 %, -10 %	
Dissipated power (during the impulse)	1, 2, 3P: 19 VA	19 VA	
	4P: 38 VA		
Illuminated PB control		Max. current 3 mA	
Operating threshold		Min. 85 % of Un in conformance with IEC/EN60669-2-2	
Duration of the control order		50 ms to 1 s (200 ms recommended)	
Response time		50 ms	
Power circuit			
Voltage rating (Ue)	1P, 2P	24 ...250 V AC	
	3P, 4P	24....415 V AC	
Frequency		50 Hz or 60 Hz	
Maximum number of operations per minute		5	
Maximum number of switching operation a day		100	
Additional characteristics			
Insulation voltage (Ui)		440 V AC	
Pollution degree		3	
Rated impulse withstand voltage (Uimp)		6 kV	
Overvoltage category		IV	
Endurance (O-C)			
Electrical		200,000 cycles (AC21)	50,000 cycles (AC21)
		100,000 cycles (AC22)	20,000 cycles (AC22)
Other characteristics			
Degree of protection (IEC 60529)	Device only	IP20	
	Device in modular enclosure	IP40 Insulation class II	
Operating temperature		-5°C to +60°C	
Storage temperature		-30°C to +70°C	
Tropicalization (IEC 60068-1)		Treatment 2 (relative humidity of 95% at 55°C / 131°F)	

#### Operation

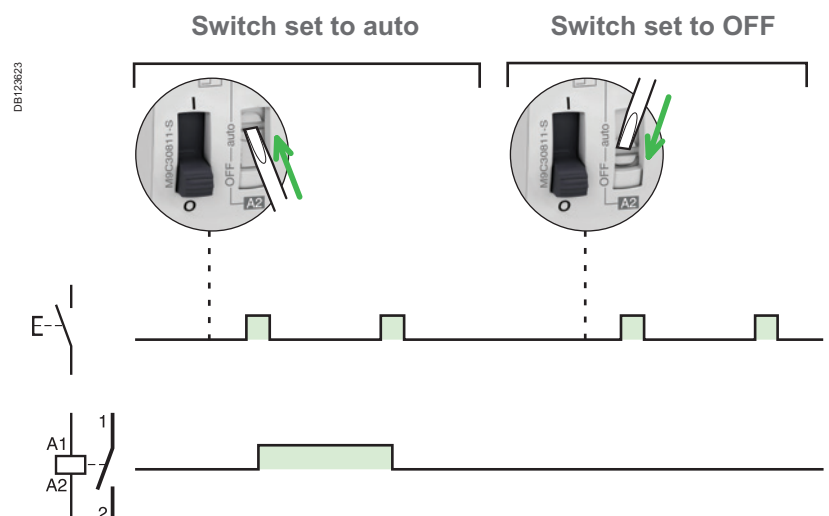



# Auxiliaries


## Electrical auxiliaries








### Compliance with electrical auxiliaries standards

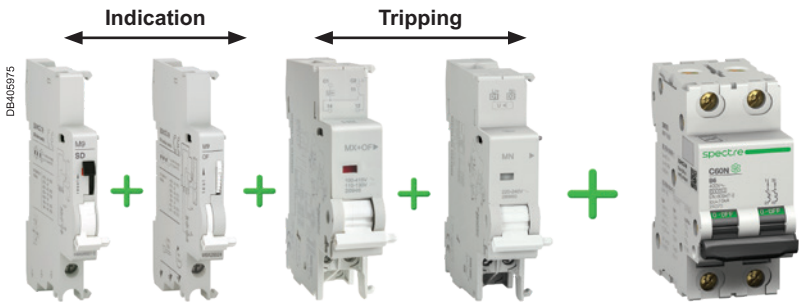- UL 489 Branch circuit protection File #E215117.
- CSA C22.2 No. 5 Branch circuit protection File #179014.
- UL 1077 Supplementary Protection File #E90509.
- CSA C22.2 No. 235 Supplementary Protection File #179014.
- IEC 60947-1 and IEC 60947-5-1 circuit breakers.
- CE Marked.

- The electrical auxiliaries provide the remote tripping or position (open/closed/tripped) indication functions of these devices in the event of an electrical fault.
- They clip on (no tool required) to the left-hand side of associated device.
- The SD+OF auxiliary is a two-in-one product consisting of SD and OF auxiliaries in a single device.




### Combination table

Indication auxiliaries		Tripping auxiliaries	Devices
			 C60  N60
1 SD+OF maxi	1 SD+OF maxi	1 maxi	
1 OF maxi	1 (SD+OF or SD or OF) maxi	2 maxi	

- ⚠ Tripping devices must be installed first.
- ⚠ If two tripping devices are used: the MN under voltage release must be installed first
- ⚠ Indication auxiliaries: install the SD auxiliaries first

Auxiliaries






Electrical auxiliaries (cont.)




Connection

Type	Tightening torque	Copper cables
Indication and tripping auxiliaries	1 N.m / 9 lb.in	<b>Rigid</b>
		DB122046 2 cables, 1.5 mm <sup>2</sup> / #16 AWG or 1 cable, 2.5 mm <sup>2</sup> / #14 AWG

Dimensions (mm)

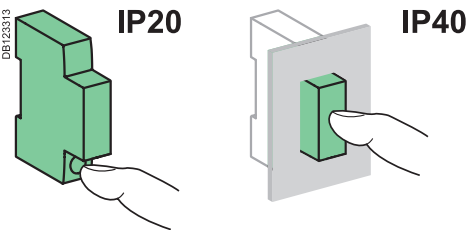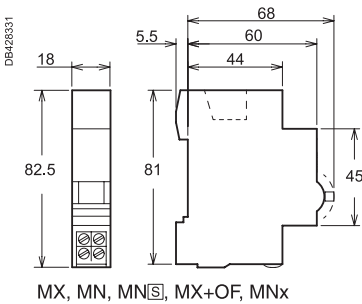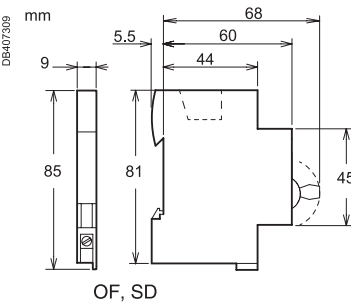

Clip on DIN rail 35 mm (1.38 in)



Indifferent position of installation

Weight (g)

Electrical auxiliary	
Type	
MN	66 g
MN	66 g
MNx	73 g
Mx	60 g
Mx+OF	65 g
OF	33 g
SD	30 g
SD+OF	38 g

## Auxiliaries














### Electrical auxiliaries (cont.)

Auxiliaries		Tripping	
		MN	MN <sup>S</sup>
Type		Undervoltage release Instantaneous	Delayed
PB100202_SE-30		PB100203_SE-30	
PB100205_SE-30		PB100206_SE-30	
Function		MNx	
<ul style="list-style-type: none"> <li>Causes the device with which it is associated to trip when its input voltage decreases (between 70% and 35% of <math>U_n</math>). Prevents the device from closing until its input voltage has been restored</li> </ul>		<ul style="list-style-type: none"> <li>Tripping of the associated device by opening of the control circuit (e.g. push-button, dry contact)</li> <li>A drop in the supply voltage does not trip the associated device</li> <li>A locking push-button control allows the circuit protected (e.g. machine control) to be placed in safety configuration</li> </ul>	
Wiring diagrams			
DB118004		DB408947	
Utilization			
<ul style="list-style-type: none"> <li>Emergency stop via a normally-closed pushbutton</li> <li>Improves the safety of the power supply circuits of several machines by preventing "uncontrolled" restarting</li> </ul>		<ul style="list-style-type: none"> <li>Fail-safe emergency stop</li> <li>Insensitive to the variation in the control circuit voltage to improve continuity of service</li> <li>Important: before any servicing operation switch off the main power supply (voltage presence terminals E1/E2)</li> </ul>	
Catalogue numbers		M9A27108	M9A27107
		M9A26960	M9A26961
		M9A26959	M9A26963
		M9A26969	M9A26971
Technical specifications			
Rated voltage ( $U_e$ )	V AC	24	120
	V DC	24	48
Operating frequency	Hz	50/60	400
Pollution degree		3	3
Mechanical state indicator light, red		On front face	On front face
Test function		-	-
Width in 9 mm (0.35 in) modules		2	2
Operating current		-	-
Number of contacts		-	-
Operating temperature		-25... +50°C / -13...122°F	-25... +50°C / -13...122°F
Storage temperature		-40... +85°C / -40...185°F	-40... +85°C / -40...185°F
Standards			
IEC/EN 60947-1		■	■
IEC/EN 60947-5-1		-	-
EN 60947-2		■	-
EN 62019-2		-	-
UL		■	-
SP SP		■	-
RA		■	-
CCC		-	-
EAC		■	■










## Auxiliaries

### Electrical auxiliaries (cont.)

#### Schneider Electric

Auxiliaries	MX			MX+OF			OF	SD
Type	Shunt release			With open/closed auxiliary contact			open/closed auxiliary contact	Electrical fault indicating contact
	<div>PB100199_SE-30</div> 			<div>PB100198_SE-30</div> 			<div>PB100626_SE-30</div> 	<div>PB100627_SE-30</div> 
Function	<div>■ Tripping the associated device when it is powered on</div>			<div>■ Includes an open/closed contact (OF contact) to indicate the "open" or "closed" position of the associated device</div>			<div>■ Changeover contact indicating the "open" or "closed" position of the associated device</div>	<div>■ Changeover contact indicating the position of the associated device in the event of: □ electrical fault □ action on the tripping auxiliary</div>
Wiring diagrams	<div>DB123012</div> 			<div>DB118811</div> 			<div>DB118811</div> 	<div>DB118811</div> 
Utilization	<div>■ Emergency stop via a normally-open pushbutton</div>			<div>■ Emergency stop via a normally-open pushbutton Remote indication of the position of the associated device</div>			<div>■ Remote indication of the position of the associated device</div>	<div>■ Remote electrical fault tripping indication of the associated device</div>
Catalogue numbers	M9A26476	M9A26477	M9A26478	M9A26946	M9A26947	M9A26948	M9A26924	M9A26927
Technical specifications								
Rated voltage (Ue)	V AC	100...415	48	12...24	100...415	48	12...24	240...415
	V DC	110...130	48	12...24	110...130	48	12...24	24...130
Operating frequency	Hz	50/60			50/60			50/60
Pollution degree		3			3			3
Mechanical state indicator light, red		On front face			On front face			-
Test function		-			-			On front face
Width in 9 mm (0.35 in) modules		2			2			1
Operating current		-			3 A / 415 V AC 6A / ≤ 240 V AC			3 A / 415 V AC 6A / ≤ 240 V AC
Number of contacts		-			1 NO/NC			1 NO/NC
Operating temperature		-25... +50°C / -13...122°F			-25... +50°C / -13...122°F			-25... +50°C / -13...122°F
Storage temperature		-40... +85°C / -40...185°F			-40... +85°C / -40...185°F			-40... +85°C / -40...185°F
Standards								
IEC/EN 60947-1		■			■			-
IEC/EN 60947-5-1		-			-			■
EN 60947-2		-			-			-
EN 62019-2		-			-			■
		■			■			■
		■			■			■
		■			■			■
		-			■			■
		■			■			■


## Spectre

	OF+OF / SD+OF	OF	SD	SD+OF
	Double open/closed or fault indicating contact	open/closed auxiliary contact	Electrical fault indicating contact	Double open/closed or fault indicating contact
				
	<p>■ The SD+OF auxiliary is a two-in-one product: choice of OF or SD contact via the selector switch</p>	<p>■ Changeover contact indicating the "open" or "closed" position of the associated device</p>	<p>■ Changeover contact indicating the position of the associated device in the event of:</p> <ul style="list-style-type: none"> <li>□ electrical fault</li> <li>□ action on the tripping auxiliary</li> </ul>	<p>■ The SD+OF auxiliary is a two-in-one product</p>
	  <p>OF position      SD position</p>			
	<p>■ Remote position and/or fault tripping indication of the associated device</p>	<p>■ Remote indication of the position of the associated device</p>	<p>■ Remote electrical fault tripping indication of the associated device</p>	<p>■ Remote position and/or fault tripping indication of the associated device</p>
	<b>M9A26929</b>	<b>M9A26924-S</b>	<b>M9A26927-S</b>	<b>M9A26929-S</b>
	240...415	240...415	240...415	240...415
	24...130	24...130	24...130	24...130
	50/60	50/60	50/60	50/60
	3	3	3	3
	On front face	-	On front face	On front face
	On front face	On front face	On front face	On front face
	1	1	1	1
		3 A / 415 V AC 6A / ≤ 240 V AC		
	1 NO/NC + 1 NO/NC	1 NO/NC	1 NO/NC	1 NO/NC + 1 NO/NC
	-25... +50°C / -13...122°F	-25... +50°C / -13...122°F	-25... +50°C / -13...122°F	-25... +50°C / -13...122°F
	-40... +85°C / -40...185°F	-40... +85°C / -40...185°F	-40... +85°C / -40...185°F	-40... +85°C / -40...185°F
	-	-	-	-
	■	■	■	■
	-	-	-	-
	■	-	-	-
	■	-	-	-
	■	-	-	-
	■	-	-	-
	■	-	-	-
	■	-	-	-
	■	-	-	-



## Technical information

# Circuit breakers tripping curves

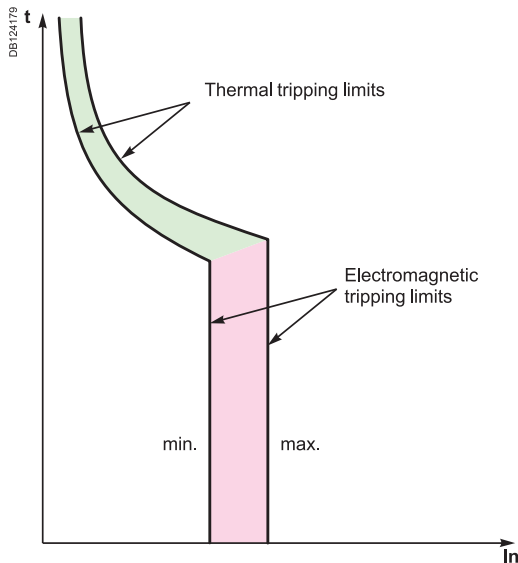

The following curves show the total fault current breaking time, depending on its amperage. For example: based on the curve on "Circuit breakers tripping curves", page 20, a C60 circuit breaker of curve C, 20 A rating, will interrupt a current of 100 A (5 times the rated current  $I_n$ ) in:

- 1 second at least
- 7 seconds at most.

The circuit breakers' tripping curves consist of two parts:

- tripping of overload protection (thermal tripping device): the higher the current, the shorter the tripping time
- tripping of short-circuit protection (magnetic tripping device): if the current exceeds the threshold of this protection device, the breaking time is less than 10 milliseconds.

For short-circuit currents exceeding 20 times the rated current, the time-current curves do not give a sufficiently precise representation. The breaking of high short-circuit currents is characterized by the current limiting curves, in peak current and in energy. The total breaking time can be estimated at 5 times the value of the ratio  $(I^2t)/(I)^2$ .

### Verification of the selectivity between two circuit breakers


By superimposing the curve of a circuit breaker on that of the circuit breaker installed upstream, one can check whether this combination will be selective in cases of overload (selectivity for all current values, up to the magnetic threshold of the upstream circuit breaker). This verification is useful when one of the two circuit breakers has adjustable thresholds; for fixed-threshold devices, this information is provided directly by the selectivity tables.

To check selectivity on short circuit, the energy characteristics of the two devices must be compared.

### Alternative current 50/60 Hz


#### C60N, C60H

According to IEC/EN 60947-2 (reference temperature 50°C)  
Curves B & C

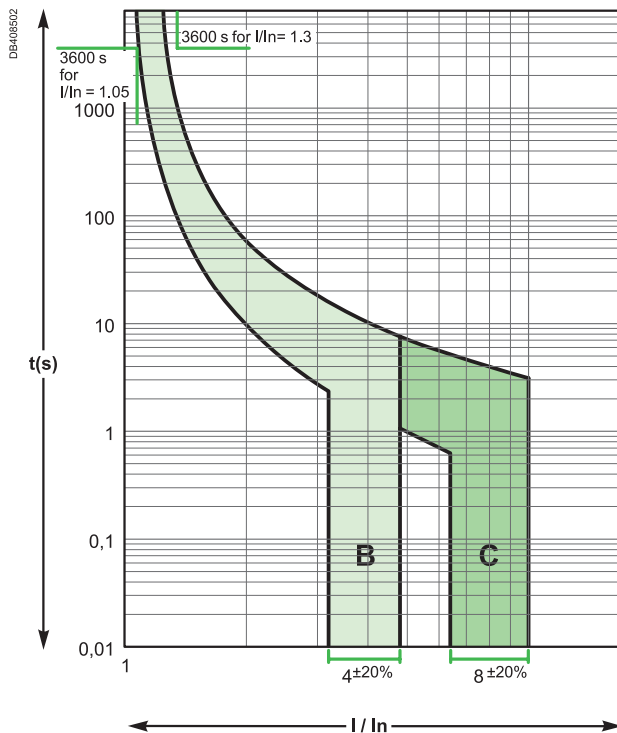

#### C60N, C60H

According to IEC/EN 60898-1 (reference temperature 30°C)  
Curves B & C

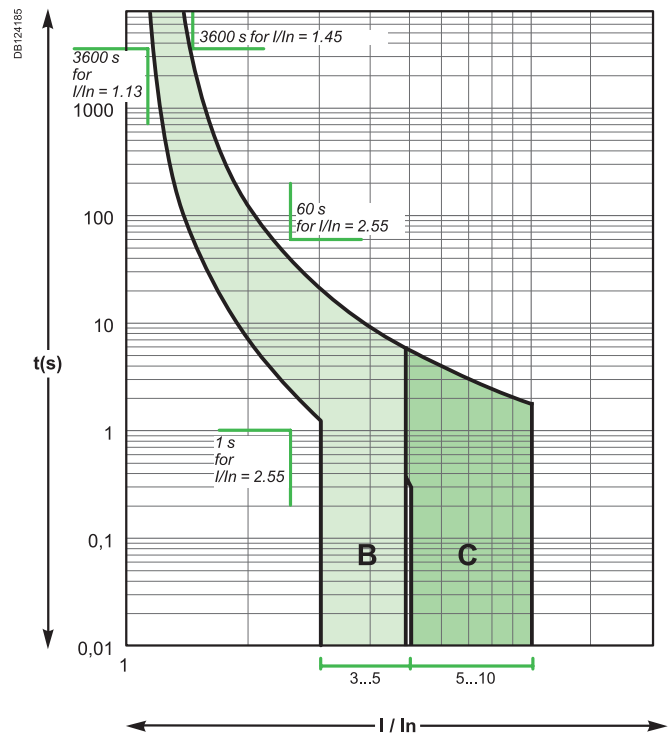

## Technical information


# Circuit breakers tripping curves (cont.)

### Direct current

**C60N, C60H**

According to IEC/EN 60947-2 (reference temperature 50°C)

Curves B & C

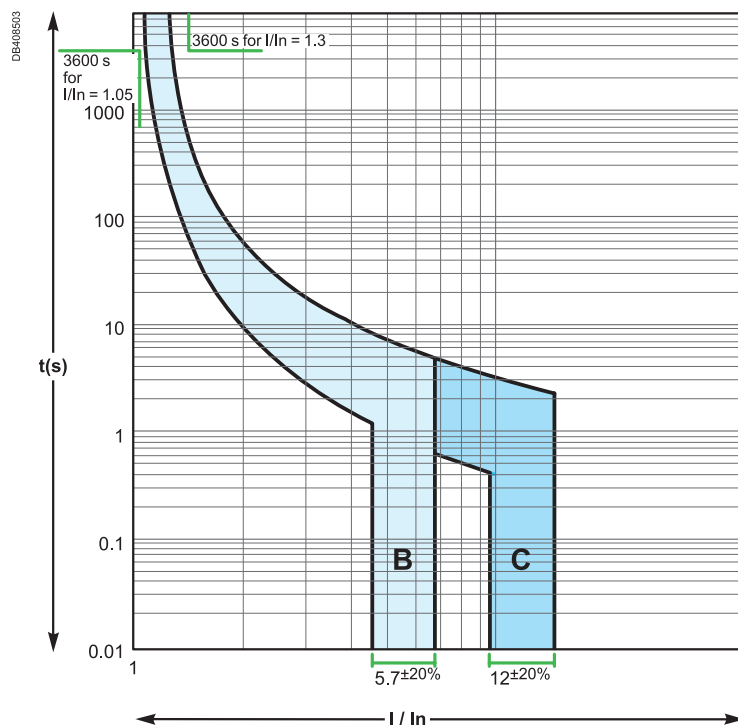

The circuit-breaker characteristics chosen depend on the type of load downstream of the installation. The rating depends on the size of the cables to be protected and the curves depend on the load inrush current.



### Product selection according to the load inrush current

When certain "capacitive" loads are switched on, very high inrush currents appear during the first milliseconds of operation. The left graphs show the average non-tripping curves of our products for this time range (50  $\mu$ s to 10 ms).

This information allows us to select the most appropriate product, according to the load specifications: curve and rating.

### Example

When a C60 is used with a load with current peaks in the order of 200  $I_n$  during the first 0.1 millisecond, a curve C product must be installed.

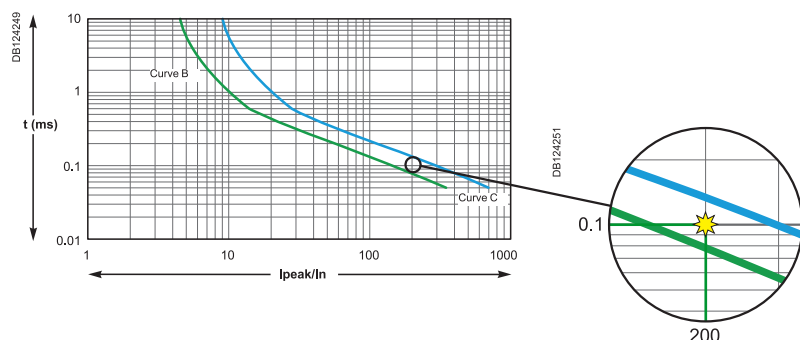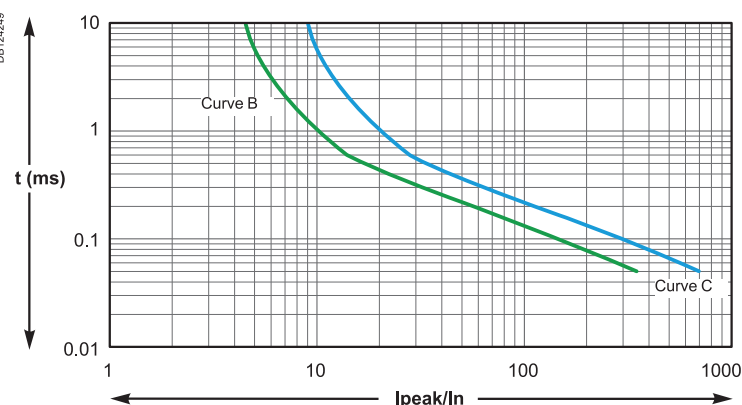

## Technical information

# Miniature circuit breakers for DC applications up to 240 V DC

This application sheet is intended to provide guidance for selecting the best protection and control components for a given DC system. It covers DC systems supplied by rectifier (AC/DC or DC/DC converter) and/or battery, isolated from or connected to earth.

The main voltages are 24 V DC, 48 V DC, 110 V DC and 220 V DC.

Selection of devices in DC can be challenging due to the diversity of voltage levels and earthing system.

In this document we will consider the following systems.

IT	TN	TN	TN
<b>Isolated from earth</b> + and - conductors protected and disconnected	<b>- (or +) earthed</b> + and - conductors protected and disconnected	<b>Midpoint earthed (not distributed)</b> + and - conductors protected and disconnected	<b>- (or +) earthed</b> + (or -) conductor only protected and disconnected

### Disconnection of one or two polarities in TN ?

IEC 60364 Electrical Installation Rules (Chapter 42) can be applied to protect and break only the polarity that is not earthed in TN, but both + & - conductors are "active" conductors, so we recommend disconnecting both polarities.

### Positive or negative polarity earthed in TN ?

According to IEC 60479-1 upward current is twice as dangerous as downward current so for protection against electric shock it is recommended to earth the negative pole. (In some DC applications the positive polarity can be earthed for galvanic corrosion reason).

## Calculation of the short-circuit current (Isc) at the terminals of a battery

When a short-circuit occurs at its terminals, a battery discharges a current given by ohm's law:


$$I_c = \frac{V_b}{R_i}$$

where  $V_b$  = the maximum discharge voltage (battery 100% charged)  
and  $R_i$  = the internal resistance equivalent to the sum of the cell resistances (figure generally given by the manufacturer in terms of Ampere-hour capacity of the battery).

#### example

What is the short-circuit current at the terminals of standing battery with the following characteristics:

capacity: 500 Ah  
maximum discharge voltage: 240V (110 cells of 2.2 V)  
discharge current: 300 A  
autonomy: 30 mm  
internal resistance: 0.5 mΩ per cell



$$R_i = 110 \times 0.5 \times 10^{-3}$$

$$I_{sc} = \frac{240}{66 \times 10^{-3}} = 4.4 \text{ kA}$$

As the above calculation shows, the short-circuit current is relatively weak.

Note: If the internal resistance is not known, the following approximate formula can be used:

$I_{sc} = kC$ , where  $C$  is the capacity of the battery expressed in Ampere-hours, and  $k$  is a coefficient close to 10 but in any case always lower than 20.

## Technical information

# Miniature circuit breakers for DC applications up to 240 V DC (cont.)

## Circuit breaker selection

Selection of a circuit breaker depends essentially on the distribution-system parameters presented below which are used to determine the corresponding characteristics:













- Type of system - determines the type of product and the number of poles connected in series for each polarity.
- Rated voltage - determines the number of series poles taking part in current interruption.
- Nominal current - determines the rated current of the circuit breaker.
- Maximum short-circuit current at the point of installation - determines the breaking capacity.

Types of system			
	Earthed systems	Isolated systems	
	The source has one earthed polarity <sup>(1)</sup>	The source has an earthed mid-point	
Diagrams and various faults			
Fault analysis (neglecting resistance of earth electrodes)			
Fault A	<ul style="list-style-type: none"><li>■ Maximum <math>I_{sc}</math> at U</li><li>■ Only protected polarity concerned</li><li>■ All poles of protected polarity must have breaking capacity <math>\geq I_{sc} \text{ max. at U}</math></li></ul>	<ul style="list-style-type: none"><li>■ Maximum <math>I_{sc}</math> at <math>U/2</math></li><li>■ Only positive polarity concerned</li><li>■ All poles of positive polarity must have breaking capacity <math>\geq I_{sc} \text{ max. at } U/2</math></li></ul>	<ul style="list-style-type: none"><li>■ No consequences</li><li>■ The fault must be indicated by an IMD (insulation-monitoring device) and cleared (standard IEC/EN 60364)</li></ul>
Fault B	<ul style="list-style-type: none"><li>■ Maximum <math>I_{sc}</math> at U</li><li>■ If only one polarity (the positive here) is protected, all poles of protected polarity must have breaking capacity <math>\geq I_{sc} \text{ max. at U}</math></li><li>■ If both polarities are protected, to enable disconnection, all poles of the two polarities must have breaking capacity <math>\geq I_{sc} \text{ max. at U}</math></li></ul>	<ul style="list-style-type: none"><li>■ Maximum <math>I_{sc}</math> at U</li><li>■ Both polarities are concerned</li><li>■ All poles of the two polarities must have breaking capacity <math>\geq I_{sc} \text{ max. at U}</math></li></ul>	<ul style="list-style-type: none"><li>■ Maximum <math>I_{sc}</math> at U</li><li>■ Both polarities are concerned</li><li>■ All poles of the two polarities must have breaking capacity <math>\geq I_{sc} \text{ max. at U}</math></li></ul>
Fault C	<ul style="list-style-type: none"><li>■ No consequences</li></ul>	<ul style="list-style-type: none"><li>■ Same as fault A</li><li>■ All poles of the</li><li>■ Negative polarity must have breaking capacity <math>\geq I_{sc} \text{ max. at } U/2</math></li></ul>	<ul style="list-style-type: none"><li>■ Same as fault A with the same obligations</li></ul>
Double fault A and D or C and E	<ul style="list-style-type: none"><li>■ Double fault not possible, system trips on first fault</li></ul>	<ul style="list-style-type: none"><li>■ Double fault not possible, system trips on first fault</li></ul>	<ul style="list-style-type: none"><li>■ Maximum <math>I_{sc}</math> at U</li><li>■ Only positive polarity (cases A and D) or negative polarity (C and E) concerned</li><li>■ All poles of each polarity must have breaking capacity <math>\geq I_{sc} \text{ max. at U}</math></li></ul>
Most unfavorable cases			
	Fault A and fault B (if only one polarity is protected)	Fault B	Double fault A and D or C and E





















## Technical information

# Miniature circuit breakers for DC applications up to 240 V DC (cont.)

### A. circuit breaker selection for 24/48 V DC according to method of earthing

Ue = 24/48 V DC				
Method of earthing	IT	TN		
	<b>Isolated from earth</b> + and - conductors protected and disconnected 	<b>- (or +) earthed</b> + and - conductors protected and disconnected 	<b>Midpoint earthed (not distributed)</b> + and - conductors protected and disconnected 	<b>- (or +) earthed</b> + (or -) conductor protected and disconnected 
Breaking capacity	Rating			
Isc ≤ 10 kA	In ≤ 63 A	 	 	
		C60N/H 2P	C60N/H 1P	
Isc ≤ 20 kA	In ≤ 63 A	 	 	
		C60H 2P	C60H 1P	

### B. circuit breaker selection for 110 V DC according to method of earthing

Ue = 110 V DC						
Method of earthing		IT	TN			
		<b>Isolated from earth</b> + and - conductors protected and disconnected	<b>- (or +) earthed</b> + and - conductors protected and disconnected	<b>Midpoint earthed (not distributed)</b> + and - conductors protected and disconnected	<b>- (or +) earthed</b> + (or -) conductor protected and disconnected	
						
Breaking capacity		Rating				
Isc ≤ 20 kA	In ≤ 63 A	 	 	 	 	
		C60N/H 4P	C60N/H 3P	C60N/H 2P	C60N/H 2P	
Isc ≤ 25 kA	In ≤ 63 A	 	 	 	 	
		C60H 4P	C60H 3P	C60H 2P	C60H 2P	













Note: This table is applicable for 125 V DC floating battery voltage.




## Technical information

# Miniature circuit breakers for DC applications up to 240 V DC (cont.)

### C. circuit breaker selection for 240 V DC according to method of earthing

U <sub>e</sub> = 240 V DC				
Method of earthing	IT	TN		
	<b>Isolated from earth</b> + and - conductors protected and disconnected 	<b>- (or +) earthed</b> + and - conductors protected and disconnected 	<b>Midpoint earthed (not distributed)</b> + and - conductors protected and disconnected 	<b>- (or +) earthed</b> + (or -) conductor protected and disconnected 
<b>Breaking capacity</b> I <sub>sc</sub> ≤ 10 kA	<b>Rating</b> I <sub>n</sub> ≤ 63 A  C60N/H 4P (2x2P series)	 C60N/H 4P (1P+3P series)	 C60N/H 4P (2x2P series)	 C60N/H 4P (4P series)
I <sub>sc</sub> ≤ 15 kA	 C60H 4P (2x2P series)	 C60H 4P (1P+3P series)	 C60H 4P (2x2P series)	 C60H 4P (4P series)

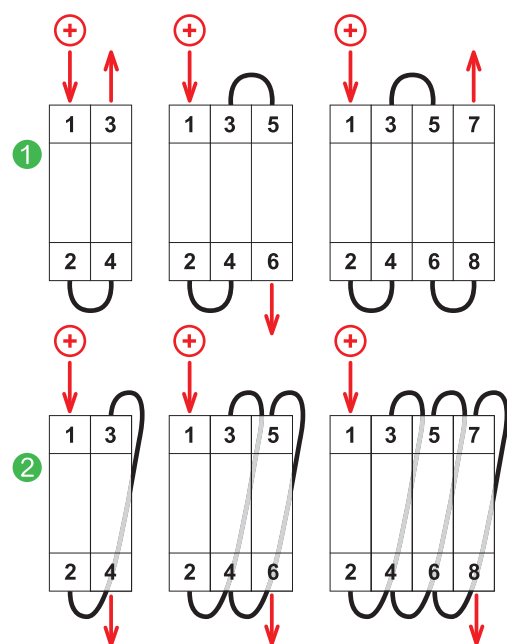

### Pole connection

#### Series connection

Series connection of the poles, by dividing the voltage per pole, optimizes the circuit breaking performance for high-voltage networks. Series connection of the poles of a circuit breaker used in direct current therefore makes it possible to:

- Divide the network voltage by the number of poles
- Have the rated current for each pole
- Have the circuit breaker's breaking capacity for all the poles.

#### Direction of cabling and cable length

In the case of series connection, the direction of cabling has a major impact on the performance of the products.

Usually the first product cabling method ① will be used.

For special applications where there is only a single possible current direction, the second cabling method ② is preferable, especially for electrical endurance properties.

Subsequently the cable cross section and length combination should be optimized, depending on the loads. Generally, a greater length and cross section improves performance.

Rating (I <sub>n</sub> )	Cross section (mm <sup>2</sup> )	Min. shunt length (mm)
≤ 63 A	≤ 16	500
	25	200
	35	100

Note: this table gives the minimum cable (shunt) lengths optimizing the equipment's performance according to the cable cross sections.



9007589826

## AuthentiTag



Stable color changes under reflected light angle



Altech Electric repeating mini text, recognizable with unarmied eyes

Micro graphics Altech Electric text, unrecognizable with unarmied eyes



Animated lines by changing the light angle

Unique serial number



Three-dimensional light change effect on Iran's map

One-dimensional grating with rainbow view field



Previous design



New design

All Schneider Electric and Spectre products are valid with the two above hologram designs





May 2025  
LVCATMULTI9M9\_EN Ver. 3.2

📍 Office:

No. 2, Shahriar DE, Fayyazi (Fereshteh) St.,  
Vali-e-Asr Ave., 1965938511, Tehran - Iran

☎ +98(21)220 38385 📠 +98(21)220 050742

📍 Plant:

No. 76, Karafainan Sq., Simin Dasht Industrial  
Town, Shahriar Road, Karaj 3165953175 - Iran

☎ +98(26)366 70166 📠 +98(26)366 70169

🌐 [altech-electric.com](http://altech-electric.com)

✉ [info@altech-electric.com](mailto:info@altech-electric.com)